


New DKT2404-UDR200 Repeater

Introduction

Toshiba is introducing the new low-profile DKT2404-UDR200 repeater to replace the DKT2404-UDR100 repeater to work exclusively with the DKT2404-DECT base station. The new repeater is more compact and easier to deploy, providing more value at the same price.


The new DKT2404-UDR200 repeater boasts the following features and enhancements:

- Supports up to 6 repeaters to a base station in either star-configuration and up to 3 repeaters in a daisy-chain configuration.
- Eliminates the need for complex and time-consuming programming when adding two or more repeaters in a daisy-chain configuration. Simply register the UDR200 to a base station and it will self-configure itself as 2nd or more repeater when installed in a daisy-chain. (DKT2404-PRGKT not needed)
- IP54 enabling outdoor installation (not waterproof)
- Complies with FCC Part 15.
- Includes AC power adaptor and wall-mount hardware.

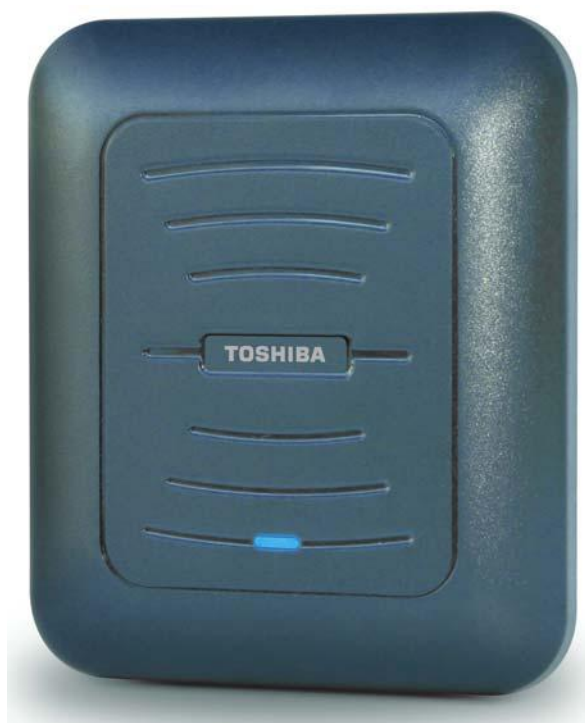


Operations

Up to six repeaters can be registered to a base station. Base station and repeaters operate in all directions. Coverage is spherical, extending in all directions including up and down.

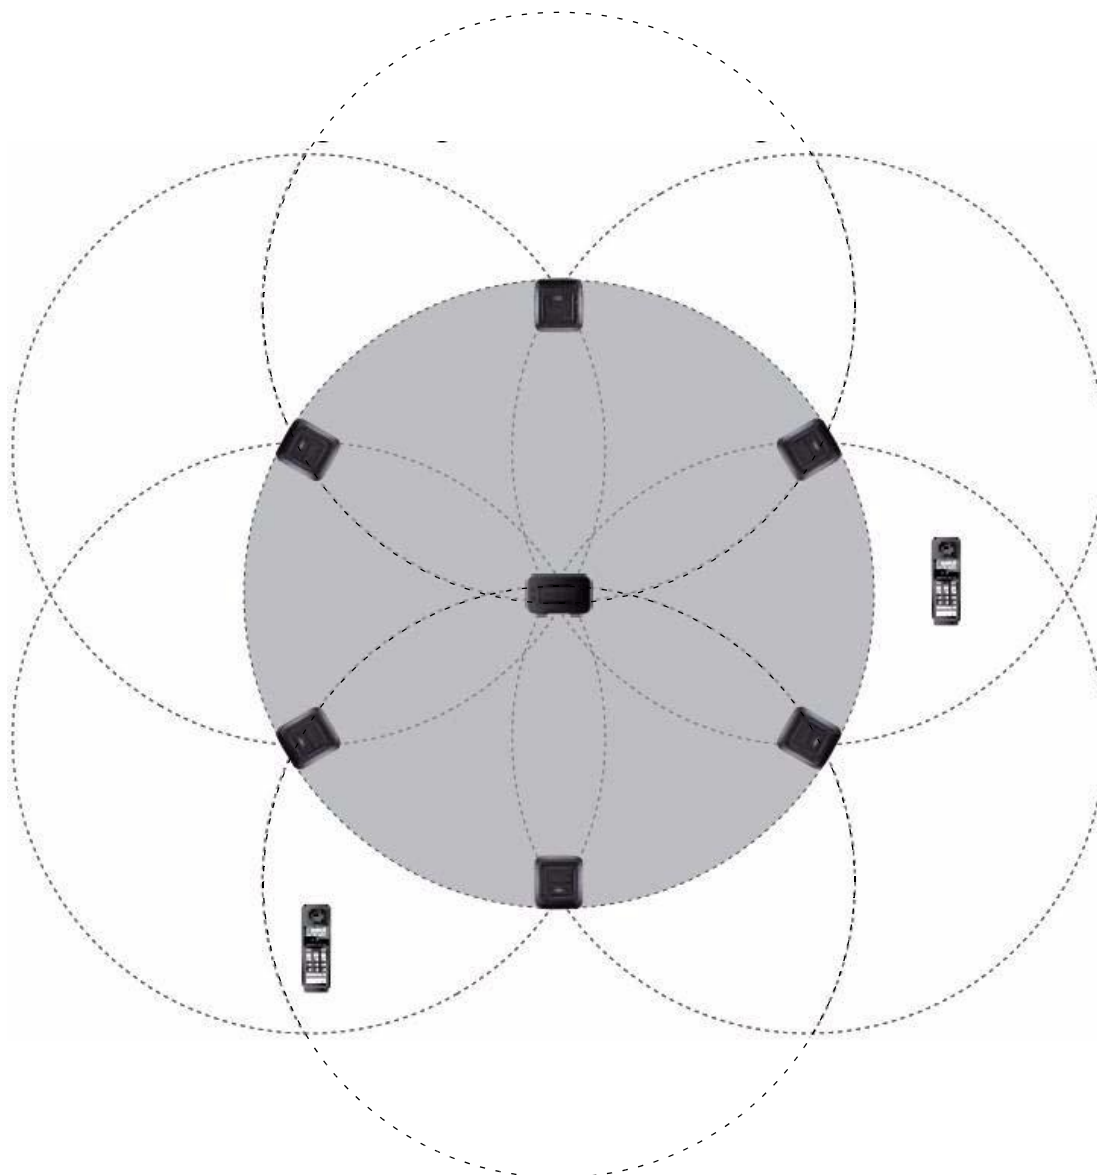

In the coverage overlap areas the repeaters will choose the connection destination.

Repeaters can be daisy chained to increase the coverage area in one direction.

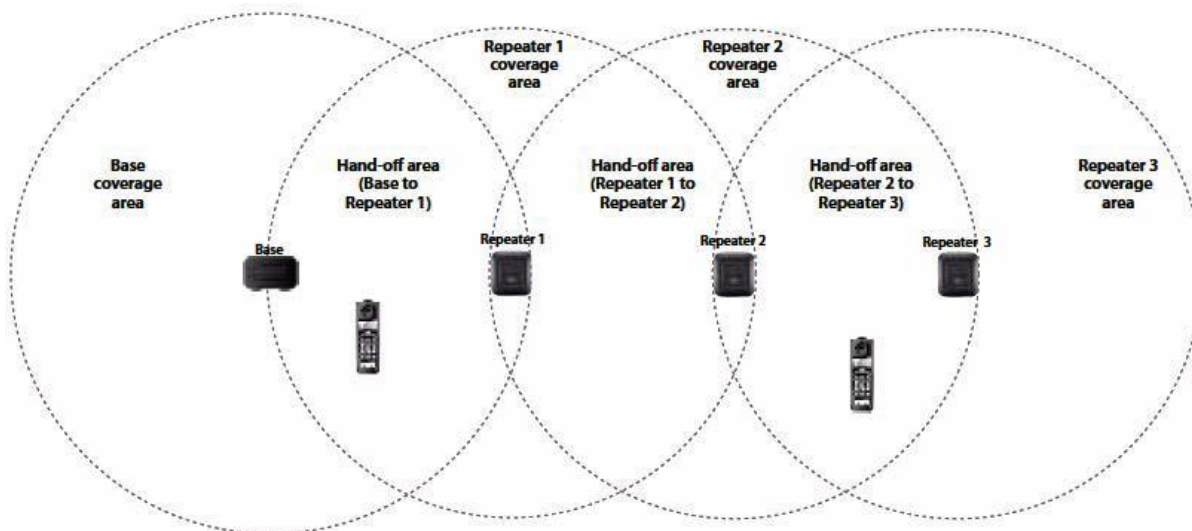

The coverage area of the base stations and repeaters is spherical, it extends through walls, floors and ceilings.

Registration

The UDR200 must register to the base station before use.

1. Press and hold the registration key on the back of the repeater. This will start the registration process. The LINK LED on the front of the repeater will flash once per second (On: 500 ms/Off: 500 ms) in registration mode.
2. Press and hold the Base Left key (CT Phone select Key) on the base. This will start the registration. The POWER LED on the Base will start to flash (On: 300 ms/Off: 300 ms) in registration mode.
3. Wait 60 seconds for the registration process to complete.
4. When the registration is successful, the LINK LED of the repeater will stop flashing and stay on.

If the registration fails, the LINK LED on the repeater will slowly flash (On: 1 s/Off: 1 s). If this happens repeat Steps 1 ~ 4.

Order Information

Part Number	Description
DKT2404-UDR200	Strata Repeater for DKT2404-DECT DECT 6.0 Base Station and Cordless Phone
DKT2404-DECT	Strata DECT 6.0 Cordless Phone with Base Station